

USAI Lighting



Quick Ship

Ships within 10 Days

Tier 1 💰 Budget Friendly



Quick Ship — Ships in 10 Days or Less


Welcome to USAI Lighting’s Quick Ship Program, ensuring delivery within 10 days for orders of 100 pieces or fewer per fixture type. Ideal for fast-paced, cost-effective projects and applications, our **Tier 1 Primary® NXT** options offer USAI’s superior white light in an elegant design. Choose from a selection of Quick Ship offerings including trimmed and trimless designs, available in white and black finishes in round and square shapes. These fixtures feature high CRI, multiple color temperatures, various beam spreads, and an integral Trimode driver (0-10V and Phase) with 1% dimming capability. Integrate seamlessly with other USAI Tier 1, 2, or 3 products to maintain a consistent aesthetic below the ceiling.

Ordering for Quick Ship

- Clearly indicate “**Quick Ship**” on purchase orders. Purchase Orders must be marked for Quick Ship to ensure shipping within 10 days.
 - Quantities above 100. Consult with USAI Lighting for quantities above 100 pieces.
 - All Quick Ship orders are subject to availability. No returns, exchanges or restocking accepted.
 - USAI reserves the right to modify this program at any time.
- Visit usailighting.com/quickship for updates.




SCAN to
Learn More

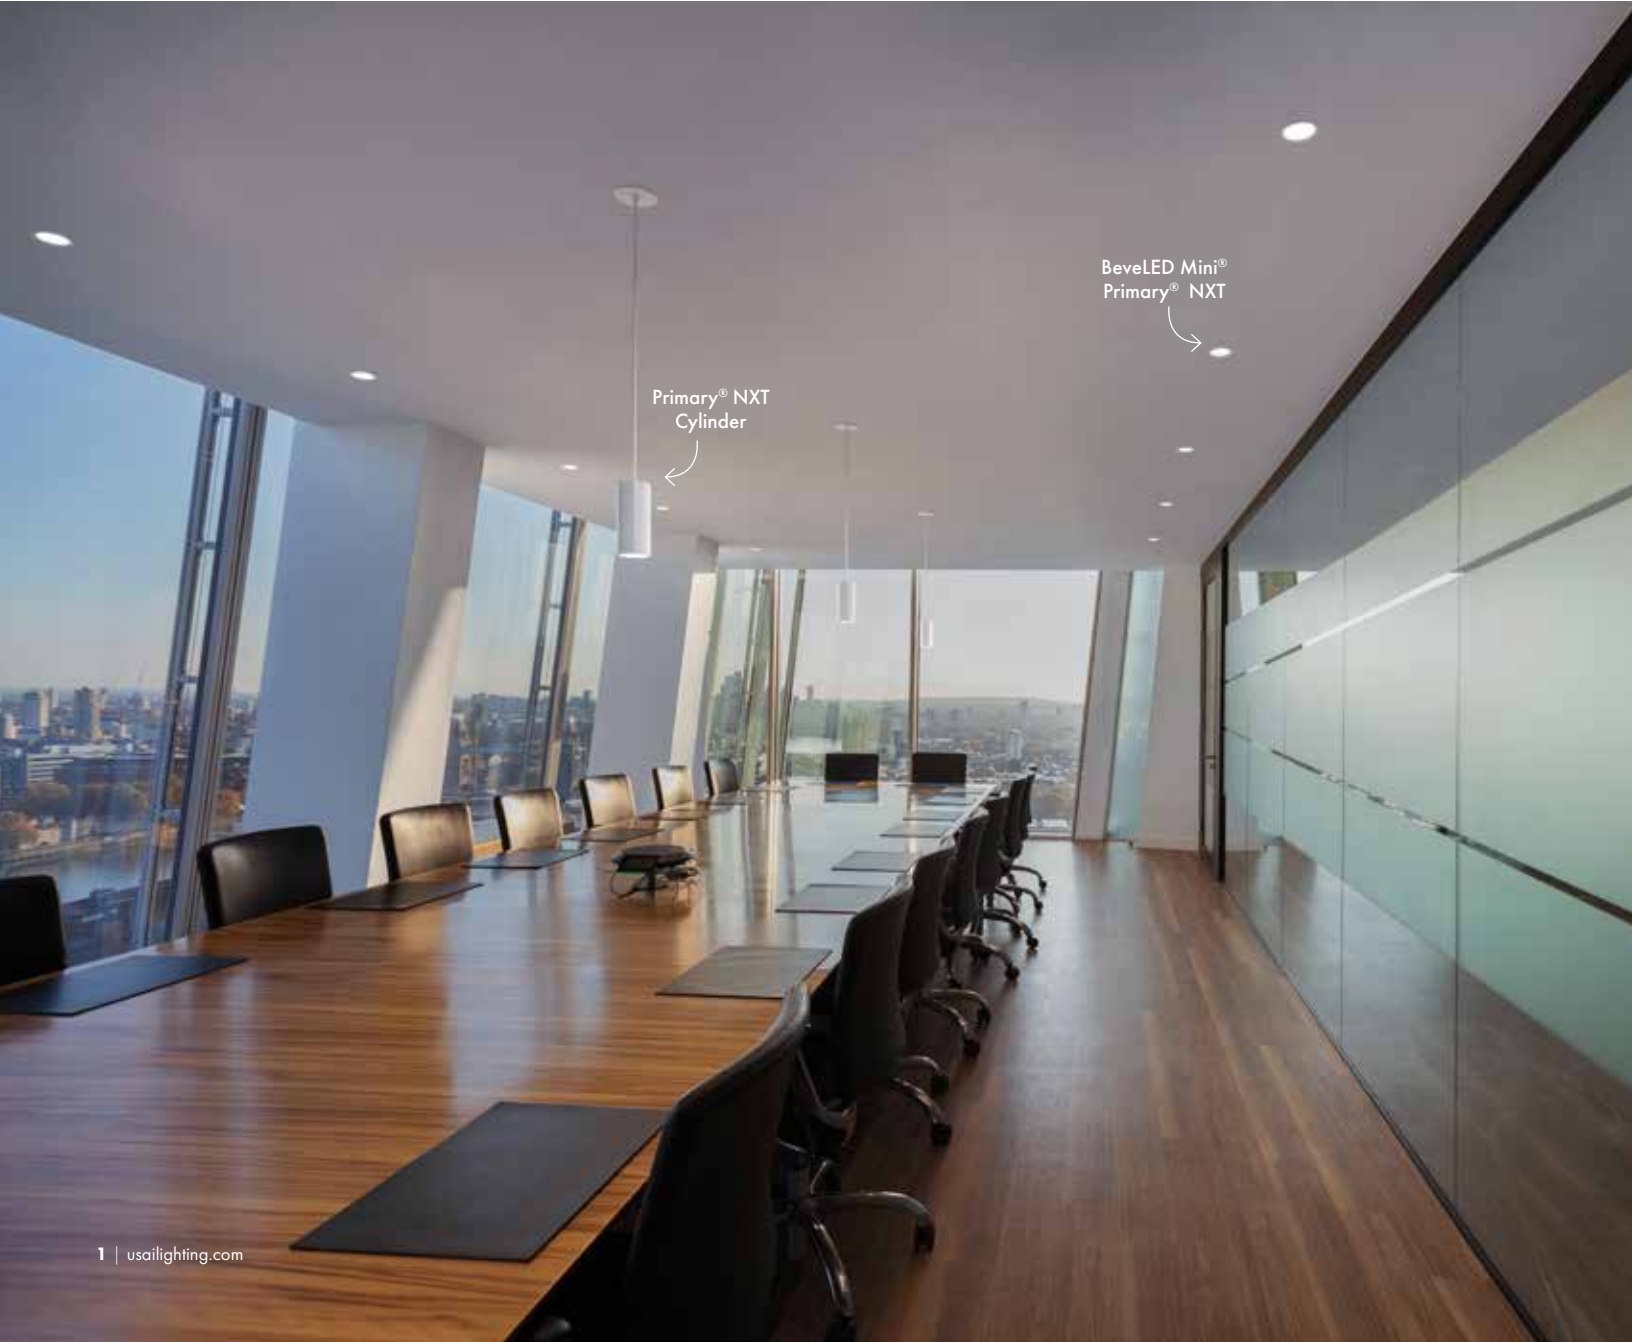

Recessed

Surface Mounts



BeveLED Mini® Primary® NXT

FEATURES

3" Aperture

Up to **1175**
Delivered Lumens

Square + Round

 Downlight

 Wall Wash

 Adjustable

Trimmed, Trimless

New Construction
and Insulation Contact
Housing Options


15W

27°, 30°, 50° Beam Options

 Classic White®
2700K, 90+ CRI
and 3000K, 90+ CRI

 T24/JA8

Trimode (0-10V and Phase)
dimming to 1%



BeveLED® 2.2 Primary® NXT

FEATURES

4.5" Aperture

Up to **2025**
Delivered Lumens

Square + Round

 Adjustable
Downlight

 Wall Wash

Trimmed, Trimless

New Construction
Housing

15W, 20W

20°, 55° Beam Options

 Classic White®
3000K, 90+ CRI
and 3500K, 90+ CRI

Trimode (0-10V and Phase)
dimming to 1%



Primary® NXT Cylinder

FEATURES

3.5" Aperture

Up to **1275**
Delivered Lumens

Round

 Downlight

Cable, Pendant Stem,
and Surface-Mounted
Options


15W

35°, 65° Beam Options

 Classic White®
3000K, 90+ CRI
and 3500K, 90+ CRI

Trimode (0-10V and Phase)
dimming to 1%

usailighting.com | 2



Primary® NXT Quick Ship Program

Ships within 10 Days

Tier 1 💰 Budget Friendly

3” BeveLED Mini® Primary® NXT – Dry/Damp/Wet Location Listed Under Covered Ceilings

Primary NXT comes with a Trimode integral driver with 1% dimming. Trimode dimming drivers work with all voltages between 120V-277V, and can be used with 0-10V, forward phase, or reverse phase dimming controls. When used with phase dimming controls, use with 120V only and cap off the 0-10V dimming control wires separately.

Downlight

Ships with 50° wide beam optic installed; field replaceable 30° medium beam optic included for field changes.

Product Ordering Code

Fixture Type	Delivered Lumens	Housing				Trim						Accessory
		Wattage	Housing	Voltage & Driver	HSG	Trim Style	Select Color Temp	High CRI	Solite Lens	Select Trim Finish*	Trim	Spackle Frame
Round Trimmed	1025	P23U-15M	NCEC	UNV-D22	HSG	P3RDF-L2M	27 or 30	KH	S	WH or BL	TRM	N/A
Round Trimmed, IC Rated	1025	P23U-15M	NCIC	UNV-D22	HSG	P3RDF-L2M	27 or 30	KH	S	WH or BL	TRM	N/A
Round Trimless	1025	P23U-15M	NCEC	UNV-D22	HSG	P3RDL-L2M	27 or 30	KH	S	WH or BL	TRM	P3R-SPAK
Round Trimless, IC Rated	1025	P23U-15M	NCIC	UNV-D22	HSG	P3RDL-L2M	27 or 30	KH	S	WH or BL	TRM	P3R-SPAK
Square Trimmed	1175	P23U-15M	NCEC	UNV-D22	HSG	P3SDF-L2M	27 or 30	KH	S	WH or BL	TRM	N/A
Square Trimmed, IC Rated	1175	P23U-15M	NCIC	UNV-D22	HSG	P3SDF-L2M	27 or 30	KH	S	WH or BL	TRM	N/A
Square Trimless	1175	P23U-15M	NCEC	UNV-D22	HSG	P3SDL-L2M	27 or 30	KH	S	WH or BL	TRM	P3S-SPAK
Square Trimless, IC Rated	1175	P23U-15M	NCIC	UNV-D22	HSG	P3SDL-L2M	27 or 30	KH	S	WH or BL	TRM	P3S-SPAK




3” BeveLED Mini® Primary® NXT
Downlight comes in round or square, trimmed or trimless with white or black finish.

Wall Wash

Product Ordering Code

Fixture Type	Delivered Lumens	Housing				Trim						Accessory
		Wattage	Housing	Voltage & Driver	HSG	Trim Style	Select Color Temp	High CRI	Wall Wash	Select Trim Finish*	Trim	Spackle Frame
Round Trimmed	650	P23U-15M	NCEC	UNV-D22	HSG	P3RWF-L2M	27 or 30	KH	D1	WH or BL	TRM	N/A
Round Trimmed, IC Rated	650	P23U-15M	NCIC	UNV-D22	HSG	P3RWF-L2M	27 or 30	KH	D1	WH or BL	TRM	N/A
Round Trimless	650	P23U-15M	NCEC	UNV-D22	HSG	P3RWL-L2M	27 or 30	KH	D1	WH or BL	TRM	P3R-SPAK
Round Trimless, IC Rated	650	P23U-15M	NCIC	UNV-D22	HSG	P3RWL-L2M	27 or 30	KH	D1	WH or BL	TRM	P3R-SPAK
Square Trimmed	825	P23U-15M	NCEC	UNV-D22	HSG	P3SWF-L2M	27 or 30	KH	D1	WH or BL	TRM	N/A
Square Trimmed, IC Rated	825	P23U-15M	NCIC	UNV-D22	HSG	P3SWF-L2M	27 or 30	KH	D1	WH or BL	TRM	N/A
Square Trimless	825	P23U-15M	NCEC	UNV-D22	HSG	P3SWL-L2M	27 or 30	KH	D1	WH or BL	TRM	P3S-SPAK
Square Trimless, IC Rated	825	P23U-15M	NCIC	UNV-D22	HSG	P3SWL-L2M	27 or 30	KH	D1	WH or BL	TRM	P3S-SPAK

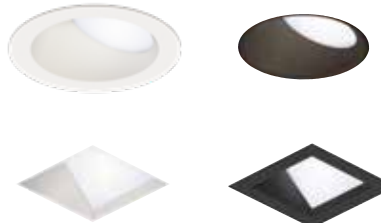


3” BeveLED Mini® Primary® NXT
Wall Wash comes in round or square, trimmed or trimless with white or black finish.

Adjustable

Ships with 27° TIR optic installed; replacement optics for 20°, 35°, and 50° beams are available on spec sheets with standard lead times.

Product Ordering Code

Fixture Type	Delivered Lumens	Housing						Trim				Accessory
		Wattage	Select Color Temp	High CRI	Housing	Voltage & Driver	HSG	Trim Style	Solite Lens	Select Trim Finish*	Trim	Spackle Frame
Round Trimmed, IC Rated	1075	P3RA-15L2M	27 or 30	KH	NCAIC	UNV-D22	HSG	P3RAF	S	WH or BL	TRM	N/A
Round Trimless, IC Rated	1075	P3RA-15L2M	27 or 30	KH	NCAIC	UNV-D22	HSG	P3RAL	S	WH or BL	TRM	P3RA-SPAK
Square Trimmed, IC Rated	1150	P3SA-15L2M	27 or 30	KH	NCAIC	UNV-D22	HSG	P3SAF	S	WH or BL	TRM	N/A
Square Trimless, IC Rated	1150	P3SA-15L2M	27 or 30	KH	NCAIC	UNV-D22	HSG	P3SAL	S	WH or BL	TRM	P3SA-SPAK

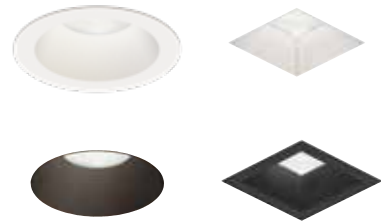

3” BeveLED Mini® Primary® NXT
Adjustable comes in round or square, trimmed or trimless with white or black finish.

NOTES

- Nailer bars are included. Butterfly brackets and channel bars are extra:
 - ° PFBK-CB27 (27”)
 - ° PFBK-CB32 (32”)
 - ° PFBK-CB52 (52”)



Primary® NXT Quick Ship Program

Ships within 10 Days

4.5” BeveLED® 2.2 Primary® NXT– Dry/Damp/Wet Location Listed Under Covered Ceilings

Primary NXT comes with a Trimode integral driver with 1% dimming. Trimode dimming drivers work with all voltages between 120V-277V, and can be used with 0-10V, forward phase, or reverse phase dimming controls. When used with phase dimming controls, use with 120V only and cap off the 0-10V dimming control wires separately.

Adjustable Downlight

Ships with 20° or 55° TIR optic installed; replacement optics for 25° and 40° beams are available on spec sheets with standard lead times.

Product Ordering Code

Fixture Type	Delivered Lumens	Housing						Trim					Accessory
		Wattage	Select Color Temp	High CRI	Housing	Voltage & Driver	HSG	Trim Style	Select Optic	Solite Lens	Select Trim Finish*	Trim	Spackle Frame
Round Trimmed, 15W	1150 - 1475	PB4R-15L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4RAF	T20 or T55	S	WH-WH or BL-BL	TRM	N/A
Round Trimless, 15W	1150 - 1475	PB4R-15L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4RAL	T20 or T55	S	WH or BL	TRM	PB4R-SPAK
Square Trimmed, 15W	1150 - 1475	PB4S-15L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4SAF	T20 or T55	S	WH-WH or BL-BL	TRM	N/A
Square Trimless, 15W	1150 - 1475	PB4S-15L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4SAL	T20 or T55	S	WH or BL	TRM	PB4S-SPAK
Round Trimmed, 20W	1550 - 2025	PB4R-20L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4RAF	T20 or T55	S	WH-WH or BL-BL	TRM	N/A
Round Trimless, 20W	1550 - 2025	PB4R-20L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4RAL	T20 or T55	S	WH or BL	TRM	PB4R-SPAK
Square Trimmed, 20W	1550 - 2025	PB4S-20L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4SAF	T20 or T55	S	WH-WH or BL-BL	TRM	N/A
Square Trimless, 20W	1550 - 2025	PB4S-20L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4SAL	T20 or T55	S	WH or BL	TRM	PB4S-SPAK



4.5” BeveLED® 2.2 Primary® NXT
Adjustable Downlight comes in round or square, trimmed or trimless with white or black finish.

Wall Wash

Product Ordering Code

Fixture Type	Delivered Lumens	Housing					Trim						Accessory
		Wattage	Select Color Temp	High CRI	Housing	Voltage & Driver	HSG	Trim Style	Optic	Wall Wash	Select Trim Finish*	Trim	Spackle Frame
Round Trimmed, 15W	1000 - 1175	PB4R-15L3M	30 or 35	KH	NCEC	UNV-D31 UNV-D31	HSG	PB4RWF	W2	D2	WH-WH or BL-BL	TRM	N/A
Round Trimless, 15W	1000 - 1175	PB4R-15L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4RWL	W2	D2	WH or BL	TRM	PB4R-SPAK
Square Trimmed, 15W	925 - 1175	PB4S-15L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4SWF	W2	D2	WH-WH or BL-BL	TRM	N/A
Square Trimless, 15W	925 - 1175	PB4S-15L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4SWL	W2	D2	WH or BL	TRM	PB4S-SPAK
Round Trimmed, 20W	1375 - 1600	PB4R-20L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4RWF	W2	D2	WH-WH or BL-BL	TRM	N/A
Round Trimless, 20W	1375 - 1600	PB4R-20L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4RWL	W2	D2	WH or BL	TRM	PB4R-SPAK
Square Trimmed, 20W	1350 - 1575	PB4S-20L3M	30 or 35	KH	NCEC	UNV-D31	HSG	PB4SWF	W2	D2	WH-WH or BL-BL	TRM	N/A
Square Trimless, 20W	1350 - 1575	PB4S-20L3M	30 or 35	KH	NCEC		HSG	PB4SWL	W2	D2	WH or BL	TRM	PB4S-SPAK



4.5” BeveLED® 2.2 Primary® NXT
Wall Wash comes in round or square, trimmed or trimless with white or black finish.



Primary® NXT Quick Ship Program

Ships within 10 Days

Tier 1 💰 Budget Friendly

3.5" Primary® NXT Cylinder – Dry/Damp location Only

Primary NXT comes with a Trimode integral driver with 1% dimming. Trimode dimming drivers work with all voltages between 120V-277V, and can be used with 0-10V, forward phase, or reverse phase dimming controls. When used with phase dimming controls, use with 120V only and cap off the 0-10V dimming control wires separately.

Surface Mount

Product Ordering Code

Delivered Lumens	Wattage	Select Color Temp	High CRI	Select Beam	Solite Lens	Select Trim Finish*	Mounting	Voltage & Driver
900 - 1275	CPRD8-15L2	30 or 35	KH	M(35°) or F(65°)	S	WH or BL	SM	UNV-D22



Cable Mount (Field Cuttable)

Product Ordering Code

Delivered Lumens	Wattage	Select Color Temp	High CRI	Select Beam	Solite Lens	Select Trim Finish*	Mounting	Voltage & Driver
900 - 1275	CPRD8-15L2	30 or 35	KH	M(35°) or F(65°)	S	WH or BL	CR1 (2') CR2 (4') CR3 (8')	UNV-D22



Rigid Stem (Field Cuttable)

Product Ordering Code

Delivered Lumens	Cylinder Body								Cylinder Stem
	Wattage	Select Color Temp	High CRI	Select Beam	Solite Lens	Select Trim Finish*	Mounting	Voltage & Driver	Select Length and Finish
900 - 1275	CPRD8-15L2	30 or 35	KH	M(35°) or F(65°)	S	WH or BL	PR1A(2') PR2A(4') PR3A(8')	UNV-D22	P1A-WH or BL-STEM (2') P2A-WH or BL-STEM (4') P3A-WH or BL-STEM (8')



All Primary® NXT Cylinders are round and come in a white or black finish.

USAI[®]
Lighting

USAI LIGHTING COLLABORATORY
13 Crosby Street
New York, NY 10013
845-234-4090
showroom@usailighting.com

USAI LIGHTING HEADQUARTERS
1126 River Road
New Windsor, NY 12553
T: 845-565-8500
info@usailighting.com

©2025 USAI Lighting All Rights Reserved.
USAI, BeveLED, BeveLED Mini, Primary,
and Classic White are registered trademarks
of USAI, LLC. All designs protected by copyright
Covered by US Patents. CA-064D